

# XTREME POWER CONVERSION XPDU

Rack Power Distribution

For more information, visit [www.xpcc.com/xpdu](http://www.xpcc.com/xpdu)



## Rack power distribution solutions designed to meet the needs of any data center or wiring closet

Improve data center power distribution with the XPDU family, a series of power distribution units that combine the key features needed to manage high density equipment racks or wiring closets.

XPDU's deliver reliable power distribution to multiple units of connected equipment by adding up to 14 receptacles to your rack space. These PDUs compliment your current power source and are compatible with any manufacturer's UPS.

To learn more about the switched PDU visit: [www.xpcc.com/switched](http://www.xpcc.com/switched)

### PRODUCT SNAPSHOT

- › Available models: Value, Basic, or Switched
- › Vertical and horizontal configurations
- › UL, cUL, FCC, CE
- › 3 year full warranty (USA)

### FEATURES

**Plug and power**—XPDU's provide up to 14 receptacles for power distribution

**Receptacle control**—switched model includes Web/SNMP interface with monitoring software and on/off control of eight receptacles

**Hardwired models**—input pig-tail available with Basic PDU2 models

**NEMA plugs and IEC inlet**—multiple input configurations available

**Branch circuit protection**—UL1077 listed output circuit breaker

**Mounting options**—wall, rack, and floor mounting options available

**Agency listed**—UL, cUL, FCC, CE listings available


**XTREME**  
Power Conversion®

Protect your business.

# MODEL SELECTION GUIDE

For more information, visit [www.xpcc.com/xpdu](http://www.xpcc.com/xpdu)

MODEL NUMBER	Input Power Connection	Outlets	Voltage	Circuit Breaker	Dimensions (W x D x H)	Weight
<b>Switched PDU</b>						
XPD0815SL	Detachable 10 ft, 5–15P	(8) 5–15/20R	120V	15A	17 x 3.75 x 1.7 in (1U)	4.4 lbs
<b>Basic PDU</b>						
XPD815HV	12 ft, 5–15P	(8) 5–15R	120V	15A	17 x 3.75 x 1.7 in (1U)	2.6 lbs
XPD1415HV	12 ft, 5–15P	(14) 5–15R	120V	15A	17 x 3.75 x 1.7 in (1U)	3.5 lbs
XPD1420HV	12 ft, 5–20P + L5–20P	(14) 5–20R	120V	20A	17 x 3.75 x 1.7 in (1U)	4.8 lbs
XPDUIEC	IEC C20 inlet	(2) IEC C19 + (10) IEC C13	230V	15/20A	17 x 3.75 x 1.7 in (1U)	4.4 lbs
<b>Basic PDU2</b>						
XPD24	1 ft, pigtail 10/3 AWG	(2) L6–20R + (1) L6–30R	200–240VAC	30A	12.8 x 1.9 x 3.4 in (2U)	7.1 lbs
XPD24P	8 ft, L6–30P					
XPD25	1 ft, pigtail 10/3 AWG	(1) L6–30R + (1) L6–20R + (4) 6–15/20R	200–240VAC	30A	12.8 x 2.5 x 3.4 in (2U)	7.1 lbs
XPD25P	8 ft, L6–30P					
XPD26	1 ft, pigtail 10/3 AWG	(2) IEC C19 + (8) IEC C13	200–240VAC	30A	12.8 x 1.9 x 3.4 in (2U)	7.1 lbs
XPD26P	8 ft, L6–30P					
<b>Value PDU</b>						
XPS1215HVP	6 ft, 5–15P	(12) 5–15R	120V	15A	17 x 1.5 x 1.7 in (1U)	1.4 lbs

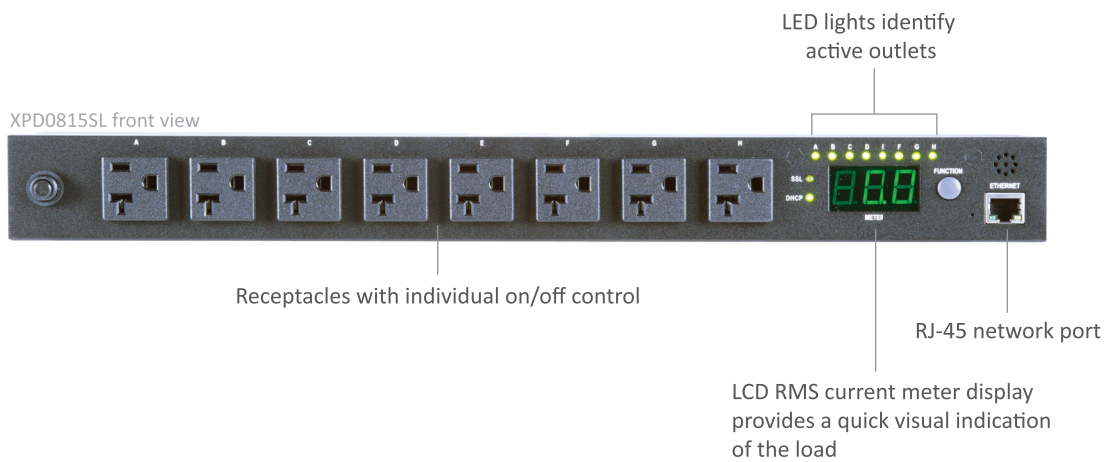

**X-TREME**  
Power Conversion®

Protect your business.

XPC USA / Denver, CO / sales@xpcc.com

XPC EMEA / London, UK / emea@xpcc.com

www.xpcc.com

©2013 Xtreme Power Conversion Corporation. All Rights Reserved. XPDU.01U (Rev 9/16/13)